

P600

VACUUM CHAMBER MACHINE



SWING-LID, DOUBLE-CHAMBER VACUUM MACHINE

FEATURING:

- Stainless steel housing and lid.
- Free-standing unit
- Automatic progressive ventilation.
- Double-seam separation sealing.
- Function for vacuum quick-stop.
- Three program memory spaces.
- Chamber size: 23.6" x 19.6".
- Lid Heights Available: 4.3" or 6.3".
- Overall Dimensions: 64.4" x 30.3" x 41.1" (53" open)
- Heavy-duty, locking casters.
- Twelve month warranty.

DISTRIBUTED EXCLUSIVELY BY



Processor Division

5710 NW 41ST STREET • RIVERSIDE MO 64150
800-456-5624 • www.bunzlpdpackaging.com

P600

VACUUM CHAMBER MACHINE



Stainless Steel Swing lid.

Lid swings down on one side for cycling, while the other side can be unloaded and reloaded.



Double-seam separation sealing.

P600 seals with a three mm wide primary seal seam and a one mm wide separation seam. The excess film on the pouch can be easily pulled off at the separation seam without using a tool. Also available with gas flushing unit.



Automatic progressive ventilation

When products with sharp edges are being packed, such as pork chops, kebab skewers or salmon portions, the pouch wraps itself gently around the contours of the packed product, reducing the risk of puncturing the pouch.




Filling plates

Filling plates reduce the volume of the chamber, when smaller or flat products are being packed. The smaller the remaining volume, the shorter the required evacuation time.



Three memory spaces for user programs

The evacuation and sealing times for frequently used applications can be saved on three keys. This includes the gas flushing time in the case of machines with a gas flushing unit.

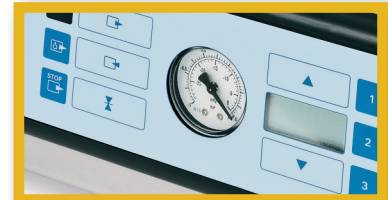

MULTIVAC Hygienic Design™

Flat deck design for easy cleaning and disinfection with fluids. Easy-care materials and smooth surfaces ensure quick and simple cleaning. Filling plates, insert and plug-in sealing bar easily removeable without tools.



Electric

220V/3P/60Hz/40A

Cord length: 16.4' pigtail cord.

SPECIFICATIONS

ITEM NO.	DESCRIPTION	SEAL BAR LENGTH	CYCLE PER MINUTE	PUMP	ELECTRICAL VOLTS/PHASE/HERTZ/AMPS	GAS	AIR	CASTERS
B529 1206	P600 Small	23.6" x 4 bars	2 -3	3.0 HP	220V3P60HZ40A	N	N	N
B529 1207	P600 Small MAP	23.6" x 4 bars	2 - 3	3.0 HP	220V3P60HZ40A	Y	N	N
B529 1208	P600 Sm./Med	23.6" x 4 bars	3	5.0 HP	220V3P60HZ40A	N	N	Y
B529 1209	P600 Sm./Med.MAP	23.6" x 4 bars	3	5.0 HP	220V3P60HZ40A	Y	N	Y
B529 1210	P600 Medium/Tall Lid	23.6" x 4 bars	2 - 3	5.0 HP	220V3P60HZ40A	N	N	Y
B529 1211	P600 Medium/Tall Lid MAP	23.6" x 4 bars	2 - 3	5.0 HP	220V3P60HZ40A	Y	N	Y
B529 1212	P600 Large/Tall Lid	23.6" x 4 bars	3	7.0 HP	220V3P60HZ40A	N	N	Y
B529 1213	P600 Large/Tall Lid MAP	23.6" x 4 bars	3	7.0 HP	220V3P60HZ40A	Y	N	Y

DISTRIBUTED EXCLUSIVELY BY



Processor Division

5710 NW 41ST STREET • RIVERSIDE MO 64150
800-456-5624 • www.bunzlpdpackaging.com